



(11) Publication number : **0 322 158 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication of patent specification :  
**04.10.95 Bulletin 95/40**

(51) Int. Cl.<sup>6</sup> : **G06F 17/00**

(21) Application number : **88311895.2**

(22) Date of filing : **16.12.88**

(54) **Engine monitoring.**

(30) Priority : **23.12.87 GB 8729962**

(43) Date of publication of application :  
**28.06.89 Bulletin 89/26**

(45) Publication of the grant of the patent :  
**04.10.95 Bulletin 95/40**

(84) Designated Contracting States :  
**DE ES FR IT NL SE**

(56) References cited :  
**EP-A- 0 286 120**  
**GB-A- 2 181 250**  
**US-A- 3 731 070**  
**US-A- 4 350 008**  
**US-A- 4 606 189**

(73) Proprietor : **Smiths Industries Public Limited**  
**Company**  
**765, Finchley Road**  
**London, NW11 8DS (GB)**

(72) Inventor : **Jones, John Winston Delahay**  
**The Hay**  
**Nympsfield**  
**Stonehouse Gloucestershire (GB)**  
Inventor : **O'Sullivan, Peter Francis**  
**105 Pittville Lawn**  
**Cheltenham Gloucestershire (GB)**

(74) Representative : **Flint, Jonathan McNeill**  
**SMITHS INDUSTRIES PUBLIC LIMITED**  
**COMPANY**  
**765 Finchley Road**  
**London NW11 8DS (GB)**

**EP 0 322 158 B1**

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

This invention relates to engine monitoring apparatus for detecting abnormal start conditions of a gas-turbine engine including a sensor for deriving a first signal indicative of spool speed, and a sensor for deriving a second signal indicative of engine temperature.

During start-up procedures of a gas-turbine engine, the pilot or flight engineer (where the engine is in an aircraft) monitors a number of instruments giving details of various engine characteristics, such as N 1 and N 2 spool speeds, exhaust gas temperature EGT, and fuel flow. It is important for the engine operation to be carefully monitored during start-up because gas-turbine engines can be prone to abnormal or 'hot' starts which can lead to irreparable damage to an engine at a cost of up to about one million pounds. Some aircraft operators experience several such hot starts each year.

It will be appreciated that, at the time of starting the engine, the flight crew are faced with many other tasks as well as monitoring for hot starts. With some engines it can take up to a minute for the engine to start and for the risk of hot start to be passed. The detection of hot start relies on the flight crew's ability accurately to assess the instrument readings, to remember the various limits of operation that may be indicative of a hot start and to identify exceedance of these limits and take appropriate action. The flight crew's ability to do this whilst undertaking other activities can be restricted.

It is an object of the present invention to provide engine monitoring apparatus and methods that can be used to detect abnormal start conditions in gas-turbine engines.

According to one aspect of the present invention there is provided engine monitoring apparatus of the above-specified kind, characterised in that the apparatus includes a processor that receives the first and second signals, and that the processor monitors the dynamic relationship between the first and second signals such as to determine when the relationship is indicative of an abnormal start condition, and signals in real time an indication of such abnormal start condition.

The apparatus may include a sensor for deriving a third signal indicative of fuel flow. The apparatus may include a display that provides a visual display of spool speed and engine temperature or fuel flow. The processor preferably signals an abnormal start condition on a visual display such as by flashing the visual display such as the visual display or engine temperature.

Where the apparatus is for an aircraft engine, the apparatus may include a sensor that provides a fourth signal indicative of whether the aircraft is on the ground or in the air, the processor receiving the fourth signal and utilising the fourth signal in determining when the relationship is indicative of abnormal start conditions.

The sensor for providing the fourth signal may include an air speed sensor and or alternatively a sensor for sensing pressure on the aircraft undercarriage.

In this way, the user of the engine can be alerted to a possible abnormal start condition, enabling him to take remedial action, with a reduced risk of such an abnormal start condition being overlooked.

Monitoring apparatus for an aircraft gas turbine-engine, and its method of operation, in accordance with the present invention, will now be described, by way of example, with reference to the accompanying drawings, in which

Figure 1 shows the apparatus schematically; and

Figure 2 is a flow chart illustrating operation of the apparatus.

With reference to Figure 1, the monitoring apparatus is included within an otherwise conventional engine display system, indicated generally by the numeral 1. The system 1 has a front display panel 2 with various light-emitting diode display regions 3 to 7 on which are displayed respectively engine pressure ratio EPR, spool speed N 1, engine exhaust gas temperature EGT, spool speed N 2 and fuel flow. Each of the display regions 3 to 7 is duplicated on the panel 2 in order to enable information about two gas-turbine engines to be displayed side-by-side.

Each of the display regions 3 to 7 is driven by respective driver unit 13 to 17 which receive inputs from respective sensors 23 to 27 associated with each engine and process the sensor outputs into a suitable form for driving the display regions.

The outputs from the driver units 15 to 17 providing the EGT, N2 and fuel flow information are also supplied to a processing unit 20. The processing unit 20 also receives input signals from an outside air temperature detector 21 and from a flight/ground detector 22 (this may, for example, be an undercarriage pressure switch or an airspeed detector).

The processing unit 20 includes a memory store 28 in which is stored a model of the normal relationship between temperature EGT and spool speed N 2 at different fuel flows and outside air temperatures. Different models may be employed according to whether the engine is on the ground or in the air, this being indicated by the output of the detector 22.

The processing unit 20 monitors the dynamic relationship between engine temperature EGT, fuel fuel and

spool speed N 2, comparing this against the model stored in the store 23. In particular, the processing unit 20 derives a signal representing the rate of change of engine temperature. Generally, the temperature tracks turbine speed, an increase in EGT being accompanied by an increase in N 2. If the processing unit 20 detects that these operational conditions fall outside those of the stored model, it signals this in real time to the flight crew by supplying a signal on line 35 to the appropriate EGT display driver 15, according to the engine that is malfunctioning, to cause the display region 5 to flash. It is also possible to supply a signal to a separate alarm 30, such as an audible alarm or an indicator on a separate annunciator panel. The flashing of the display region 5 causes it to become conspicuous to the flight crew, even if the display panel is not viewed directly because, in the parafoveal region of the eye a changing image is more readily noticeable.

With reference to Figure 2, there is illustrated steps in the operation of the processing unit 20. The algorithm used in the PROCESS step is unique to each type of engine and can be provided the engine manufacturer. In general it will be necessary to generate first derivatives of the spool speeds N1, N2, N3 although derivatives of other engine or aircraft parameters may be needed for some algorithms. Examples of parameters utilised in the algorithm are shown as FUEL FLOW, EGT/ITT (inter turbine temperature), OIL TEMPERATURE, OIL PRESSURE, OIL QUANTITY, N1, N2, N3, N°1, N°2 and, N°3. It may not be necessary to use all of these parameters, or additional parameters may be needed for other algorithms. Limits are set according both to predetermined absolute levels and to levels determined by the PROCESS step. One or more COMPARISON steps are performed and if the limits are exceeded, an abnormal start signal is generated.

In some applications of gas-turbine engines, the detection of an abnormal start could be used to interrupt fuel flow automatically to the engine. This, however, is considered generally undesirable in aircraft applications where engine shut-down can be dangerous.

An example of a state-of-the art system may be found in patent document US-A-4 350 008.

An abnormal start condition is one which eventually increases the probability of damage or distress to the engine. In some circumstances, abnormal start conditions can occur but the engine continues to start. This may not lead to immediate failure of the engine but can lead to increased fatigue and thereby reduce its safe operating life. The apparatus of the present invention enables abnormal start conditions to be detected at an early stage, before damage or distress is caused to the engine.

In addition to the detection of 'hot starts' the processing unit 20 can be arranged to detect other abnormal start conditions, such as a 'hung start'. Because different engines operate in different ways the monitoring apparatus may function in different ways, although, in general the processing unit will need to receive inputs indicative of engine temperature, fuel flow and spool speed.

The processing unit 20 need not be a separate unit but could, for example, be provided by a part of the processing capability of one or more of the display driver units 13 to 17. The display driver units 13 to 17 themselves could be provided by a single unit with a multiplexed output.

## Claims

1. Engine monitoring apparatus for detecting abnormal start conditions of a gas-turbine engine including a sensor for deriving a first signal indicative a spool speed, and a sensor for deriving a second signal indicative of engine temperature, characterised in that the apparatus includes a processor (20) that receives the first and second signals, and that the processor (20) monitors the dynamic relationship between the first and second signals such as to determine when the relationship is indicative of an abnormal start condition, and a visual display (2) for signalling in real time a visual indication of such abnormal start condition, the monitoring apparatus having no control over the engine.
2. Engine monitoring apparatus according to Claim 1, characterised in that the apparatus includes a sensor for deriving a third signal indicative of fuel flow.
3. Engine monitoring apparatus according to Claim 1 or 2, characterised in that the visual display (2) provides a visual display of spool speed, and engine temperature or fuel flow.
4. Engine monitoring apparatus according to any of the preceding claims, characterised in that abnormal start condition is signalled by flashing the visual display (2).
5. Engine monitoring apparatus according to Claim 4, characterised in that abnormal start condition is signalled by flashing the visual display of engine temperature.

6. Engine monitoring apparatus according to any one of the preceding claims, characterised in that the processor (20) derives an indication of the rate of change of engine temperature.
7. Engine monitoring apparatus for an aircraft engine according to any one of the preceding claims, characterised in that the apparatus includes a sensor that provides a fourth signal indicative of whether the aircraft is on the ground or in the air, and that the processor (20) receives the fourth signal and utilises the fourth signal in determining when the relationship is indicative of abnormal start conditions.
8. Engine monitoring apparatus according to Claim 8, characterised in that the sensor for providing the fourth signal includes an air speed sensor.
9. Engine monitoring apparatus according to Claim 7 or 8, characterised in that the sensor for providing the fourth signal includes a sensor for sensing pressure on the aircraft undercarriage.

#### Patentansprüche

1. Motorüberwachungsapparat zum Erfassen abnormaler Startbedingungen eines Gasturbinenmotors, der einen Sensor zur Ableitung eines ersten Signals, das die Rotordrehzahl anzeigt, und einen Sensor zur Ableitung eines zweiten Signals, das die Motortemperatur anzeigt, umfaßt, **dadurch gekennzeichnet**, daß der Apparat einen Prozessor (20) umfaßt, der die ersten und zweiten Signale empfängt und daß der Prozessor (20) die dynamische Beziehung zwischen den ersten und zweiten Signalen überwacht, um zu bestimmen, wann die Beziehung auf eine abnormale Startbedingung hinweist und eine visuelle Anzeige (2) umfaßt, um in Realzeit eine visuelle Anzeige einer solch abnormalen Startbedingung zu signalisieren, wobei der Überwachungsapparat keine Kontrolle über den Motor hat.
2. Motorüberwachungsapparat nach Anspruch 1, **dadurch gekennzeichnet**, daß der Apparat einen Sensor zur Ableitung eines dritten Signals umfaßt, das auf den Kraftstoffdurchfluß hinweist.
3. Motorüberwachungsapparat nach Anspruch 1 oder 2, **dadurch gekennzeichnet**, daß eine visuelle Anzeige (2) für eine visuelle Anzeige der Rotordrehzahl, und der Motortemperatur oder des Kraftstoffdurchflusses vorgesehen ist.
4. Motorüberwachungsapparat nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß die abnormale Startbedingung durch Blinken der visuellen Anzeige (2) signalisiert wird.
5. Motorüberwachungsapparat nach Anspruch 4, **dadurch gekennzeichnet**, daß die abnormale Startbedingung durch Blinken der visuellen Anzeige der Motortemperatur signalisiert wird.
6. Motorüberwachungsapparat nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß der Prozessor (20) eine Anzeige der Änderungsgeschwindigkeit der Motortemperatur liefert.
7. Motorüberwachungsapparat für einen Flugzeugmotor nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet**, daß der Apparat einen Sensor umfaßt, der ein viertes Signal liefert, welches darauf hinweist, ob das Flugzeug sich auf Grund oder in der Luft befindet und daß der Prozessor (20) das vierte Signal empfängt und das vierte Signal dazu benutzt, um zu bestimmen, wann die Beziehung auf abnormale Startbedingungen hinweist.
8. Motorüberwachungsapparat nach Anspruch 8, **dadurch gekennzeichnet**, daß der Sensor zur Erzeugung des vierten Signals einen Fluggeschwindigkeitssensor umfaßt.
9. Motorüberwachungsapparat nach Anspruch 7 oder 8, **dadurch gekennzeichnet**, daß der Sensor zur Erzeugung des vierten Signals einen Sensor zum Erfassen des Drucks am Flugzeugfahrgestell umfaßt.

#### Revendications

1. Dispositif de surveillance de moteur pour détecter des conditions anormales de démarrage d'un moteur

- à turbine à gaz comportant un capteur pour délivrer un premier signal indicatif d'une vitesse d'arbre et un capteur pour délivrer un second signal indicatif d'une température du moteur, caractérisé en ce que le dispositif comporte une unité de traitement (20) qui reçoit le premier et le second signal et qui surveille la relation dynamique entre le premier et le second signal de manière à déterminer quand la relation est indicative d'une condition anormale de démarrage, et un affichage visuel (2) pour délivrer en temps réel une indication visuelle d'une telle condition anormale de démarrage, le dispositif de surveillance n'exerçant pas de commande sur le moteur.
- 5
2. Dispositif selon la revendication 1, caractérisé en ce qu'il comporte un capteur pour délivrer un troisième signal indicatif d'un débit de carburant.
- 10
3. Dispositif selon la revendication 1 ou 2, caractérisé en ce que l'affichage visuel (2) donne une indication visuelle de vitesse d'arbre, et de température du moteur ou de débit de carburant.
- 15
4. Dispositif selon l'une des revendications précédentes, caractérisé en ce que la condition anormale de démarrage est signalée par un clignotement de l'affichage visuel (2).
5. Dispositif selon la revendication 4, caractérisé en ce que la condition anormale de démarrage est signalée par clignotement de l'affichage visuel de la température du moteur.
- 20
6. Dispositif selon l'une des revendications précédentes, caractérisé en ce que l'unité de traitement (20) délivre une indication du taux de variation de la température du moteur.
7. Dispositif de surveillance d'un moteur d'aéronef selon l'une des revendications précédentes, caractérisé en ce qu'il comporte un capteur qui délivre un quatrième signal indiquant si l'aéronef est au sol ou en l'air, et en ce que l'unité de traitement (20) reçoit le quatrième signal et l'utilise pour déterminer si ladite relation est indicative de conditions anormales de démarrage.
- 25
8. Dispositif selon la revendication 8, caractérisé en ce que le capteur délivrant le quatrième signal comporte un capteur de vitesse de l'air.
- 30
9. Dispositif selon la revendication 7 ou 8, caractérisé en ce que le capteur délivrant le quatrième signal comporte un capteur sensible à une pression sur le train d'atterrissage de l'aéronef.

35

40

45

50

55

Fig.1

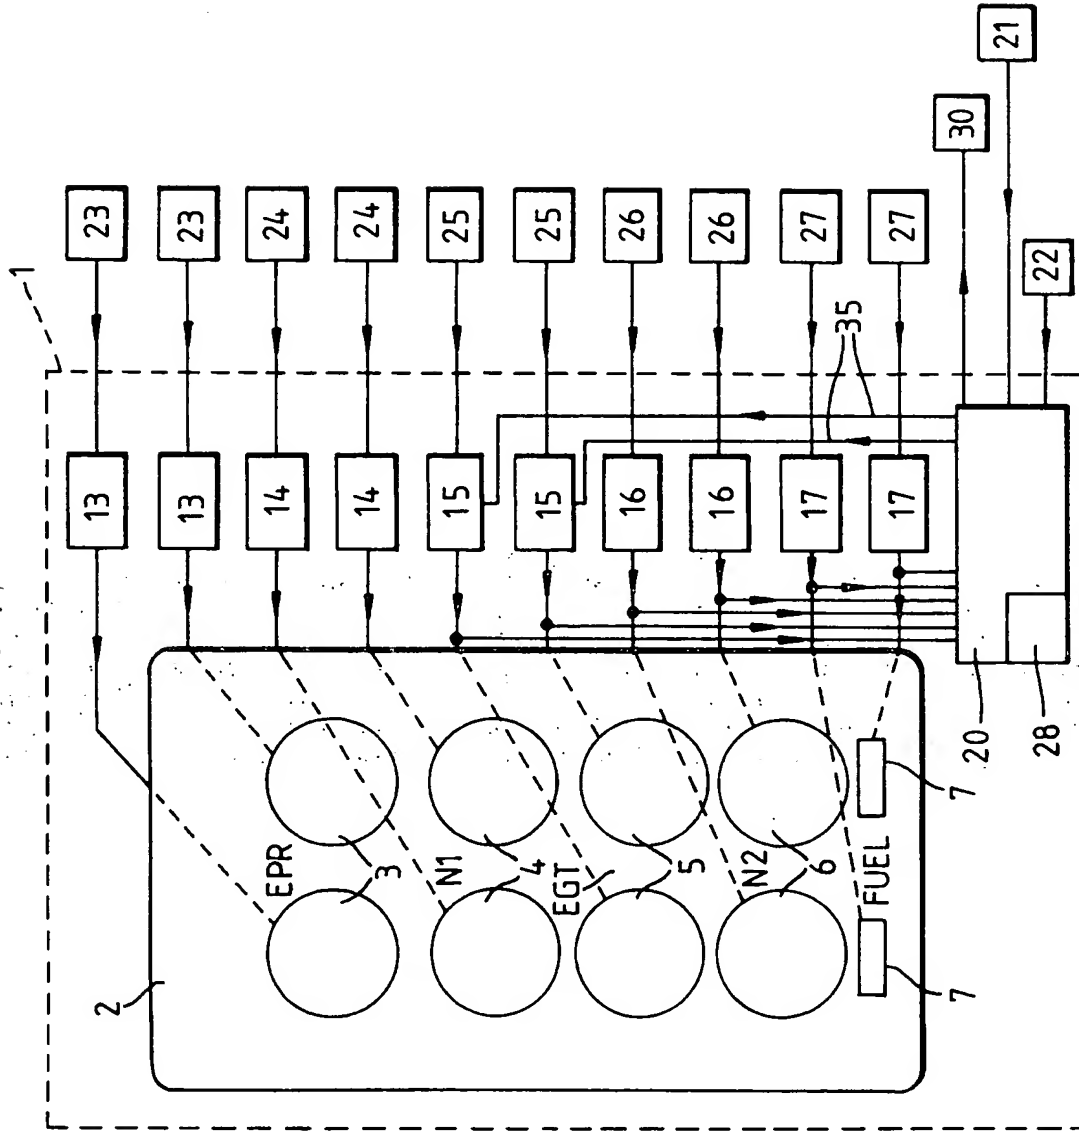


Fig.2

